

Outdoor Telecom Cabinet

HJ-OTC-FA1000 Floor mounting outdoor telecom cabinet

Overview

HUIJUE not only produce outdoor cabinets, but also provide outdoor cabinet solutions that integrate telecom equipment, power supply systems, environmental monitor systems, cooling systems, power supply and lightning protection systems, etc.

Applied to various outdoor scenes such as roofs, street, mountains, railways, and various other complex outdoor environments.



Operation Environment

Working Temperature:-20~+60°C

Storage Temperature:-40~+65°C

Working relative humidity: no more than 80% (at +30 ° C))

Storage relative humidity: ≤90%~96% (40° C±2° C)

Atmospheric pressure: 70kpa~106kPa.


Features

- HJ-OTC-FA1000 outdoor cabinet suitable for a variety of outdoor environments.
- Waterproof,Anti-corrosion,Durable
- IP degree: IP55,IP65
- Variety material optional:Galvanized sheet,Stainless Steel,Aluminum
- Variety cooling options to choose,Fans,Air condition,Heat exchange
- Floor mounting,wall mounting,pole mounting.
- Accept customized product.
- Various sensors,power distribution box,monitor,battery,etc,Optional.

Data sheet of model HJ-OTC-FA1000

S/N	HJ-OTC-FA1000
Certification	ISO,CE, RoHS
Structure	Double layer structure
Cabins	Single cabin
Material	Galvanized sheet
Doors	Front door
Thickness	19"rails:2.0mm,outer panel adopt 1.5mm,internal panel adopt 1.0mm.
Dimension	1000H*600W*600Dmm
Cooling method	1*AC220V 600W Air conditioner
Surface treatment	Painting,plasma electrostatic painting,hot galvanized, powder coating,polishing,brushing,etc.
Mounting method	Floor mounted
Cabinet contains	4*19" rail, 1*Door limit sensor, 1*AC 220V LED light, 1* Grounding bar, 2*fixed shelf, 6* ∅ 30mm bottom entrance hole
IP Degree	IP65
Color	RAL7035;
Package	Export standard plywood box + pallet package.

Drawings:

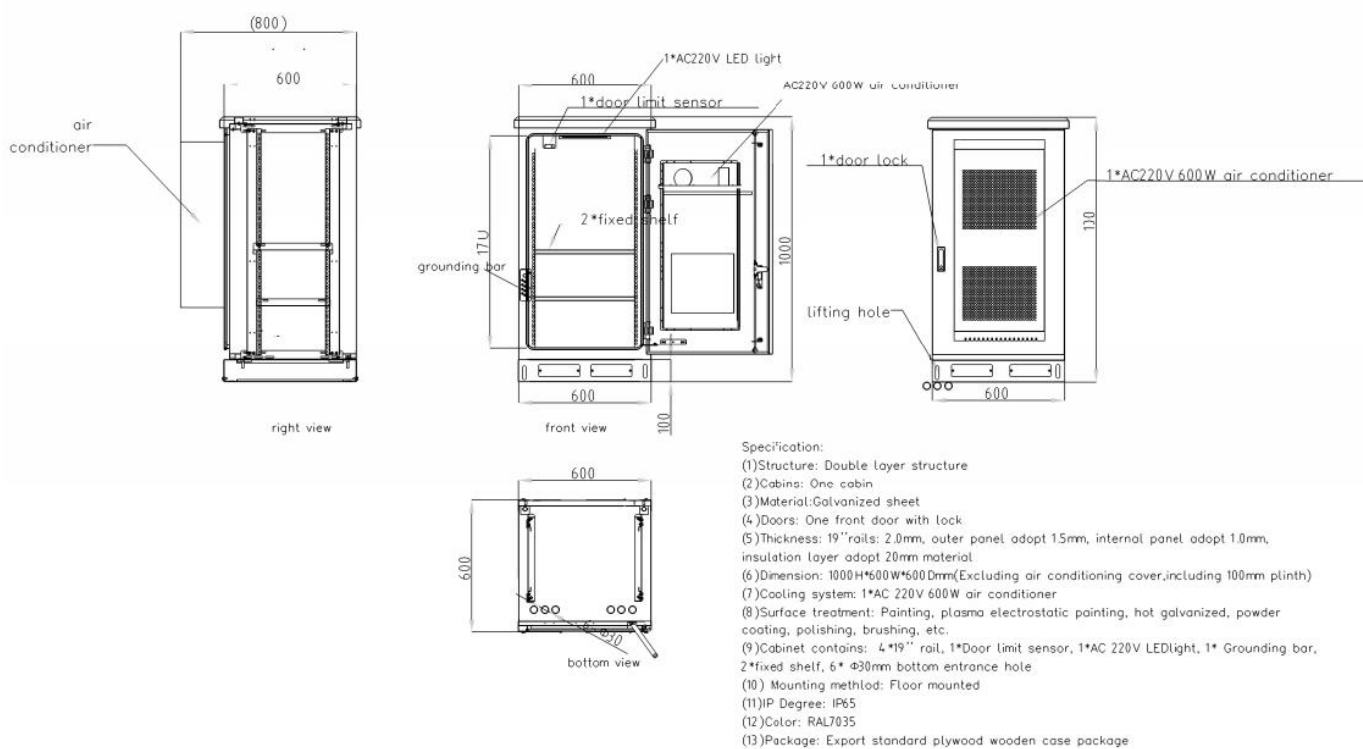

HJ-OTC-F Series Order Guide

Please fill in your detail requirement.

S/N	Your requirement	Optional
Certification		ISO,CE, RoHS
Structure		<input type="checkbox"/> Single layer structure; <input type="checkbox"/> Double layer insulation structure(optional).
Cabins		<input type="checkbox"/> Single cabin <input type="checkbox"/> Two cabins.
Material		<input type="checkbox"/> Galvanized sheet; <input type="checkbox"/> 304/316 Stainless Steel(optional); <input type="checkbox"/> Aluminum(optional).
Doors		<input type="checkbox"/> Front door; <input type="checkbox"/> Front and rear door(optional).
Thickness		<input type="checkbox"/> 19"rails:2.0mm,outer panel adopt 1.5mm,internal panel adopt 1.0mm. <input type="checkbox"/> Accept Other option according to customer.
Dimension		<input type="checkbox"/> Height:4U-45U Width:500,600mm,800mm,etc Depth:400,500,600,800,etc <input type="checkbox"/> Accept Customized size.
Cooling method		<input type="checkbox"/> 2*Fans; <input type="checkbox"/> 4*Fans; <input type="checkbox"/> Air condition (optional); <input type="checkbox"/> Heat-exchange(optional).
Surface treatment		Painting,plasma electrostatic painting,hot galvanized, powder coating,polishing,brushing,etc.
Mounting method		<input type="checkbox"/> Wall mounted & Floor mounted; <input type="checkbox"/> Pole mounted (optional).
Optional Accessories		<input type="checkbox"/> Sensors:Door alarm,Temperature Sensor,Humidity Sensor,Water Sensor,Smoke alarm,etc. <input type="checkbox"/> Cooling device:Fan,Air condition,Heat exchange. <input type="checkbox"/> Others:Shelves,light,Monitor,PDU,Power supply, Lightning protection,Breakers,Power distribution box,DDF,ODF,Battery,etc.
IP Degree		<input type="checkbox"/> IP55; <input type="checkbox"/> IP65(optional).
Color		<input type="checkbox"/> RAL7035; <input type="checkbox"/> RAL1013,etc. (optional).
Package		<input type="checkbox"/> Export standard carton box+plywood pallet; <input type="checkbox"/> Export standard plywood box package(optional).